

# 1538B 4:3 PCAP

## Open Frame Touch Monitor




### Optional :

- No Touch
- Privacy Filter
- AG Coating

## Features

*AF Coating applied*

- +10-point capacitive touch screen
- + Energy-saving LED backlight
- + 1024 X 768 DPI
- + Zero Bezel, Sealed design
- + Dust-proof and Water-proof Front Panel
- + Support OS: Windows/Android/Linux
- + 3 Years warranty

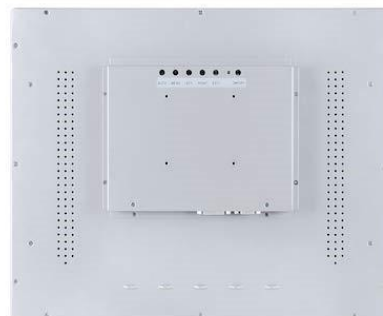

## 1538B Open Frame Touch monitor

TDS1538B Open-Frame Touchscreen Specifications	
Diagonal	15"LED
Color	Black or Silver
Aspect Ratio	4:3
Native Resolution	1024 X 768 DPI at 60Hz
Active Display Area	11.97" X 8.98"/304.13mm X 228.10mm
Contrast Ratio	800: 1
Number of Colors	16.7 million
Touch Technol	PCAP (Projected Capacitive) - 10 Touch
Brightness	LED Panel: 300nits; PCAP Touch: 280 nits
Response	8ms
Viewing Angle	Horizontal: 80° /70°; Vertical: 80° /70°
Touch Interface	USB 2.0
Video Interface	HDMI (V1.3 Type A receptacle for HDMI input) VGA (Analog VGA on Female DB-15 connector)
Input Voltage	AC: 100-240 VAC,50/60 Hz; +12VDC +/- 5%
Dimensions	13.39" x 12" X 2.05" / 340mm X 304 mm X 52mm
Weight	Unpackaged :9.9LB/4.5KG
Drop test	1kg of steel ball 1.2 meters down unbroken
Sealability	Touchscreen sealed to bezel Touchscreen sealed to LCD
Temperature	Operating: 0°C-50°C; Storage: -20°C-70°C
Humidity	Operating: 20%-80%; Storage: 10%-95%
Mounting Options	75mm VESA mount; Rear Mount; 2 Hole mounting interface on all four sides
Warranty	3-years standard
MTBF	50,000 hours demonstrated
Agency Approvals	FCC; CE; RoHS;CCC
What's in the Box	VGA Cable(1.8m); Touch USB Cable(1.8m); Power Cable(1.8m)
DC Power	12V3A(Power Jack : 2.1mmx5.5mm)